

BN 6375

REPULPABLE TAPE

Single sided repulpable tape with siliconized paper backing. Easy to apply and without bleeding. Good for splices on thin papers. All components of paper carrier are listed in FDA 21 CFR 176.170 (components of paper and paperboard in contact with aqueous and fatty food).

MAIN APPLICATIONS AND ADVICES FOR THE CORRECT TAPE USE

- Temporary butt splices
- Reel closure and core starting

TECHNICAL DATA

BACKING	Siliconized paper
ADHESIVE	Water soluble acrylic
COLOR	White
TOTAL THICKNESS	90 μ m (AFERA 4006-ED.9/79)
CD TENSILE STRENGTH	>3 daN/cm (AFERA 4004-ED.9/79)
MD TENSILE STRENGTH	>3.5 daN/cm (AFERA 4004-ED.9/79)
HEAT RESISTANCE	200 °C (internal method PS-QUA-14)
REPULPABILITY ⁽¹⁾	Full (internal method based on TAPPI UM 213-ED. 91)


(1) Non-representative results can occur if test guidelines are not followed.

WARRANTY


The tape can be stored for maximum 12 months from the date of production in dry conditions and in its original packaging. The material should be protected from extreme temperatures and direct sunlight. Once removed from its original packaging, the tape should be protected from dust and other impurities. Keep the rolls in horizontal position.

The technical information and data, recommendations, and other statements provided in this document are based on Novacel tapes tests or experience. It will be up to the user matching the product with the working process or surface. Novacel tapes will not be, at any rate, held responsible for not proper use. Warranty is limited to replacement of products that Novacel tapes proves to be defective and keeps out any other damages.

www.novacel-solutions.com

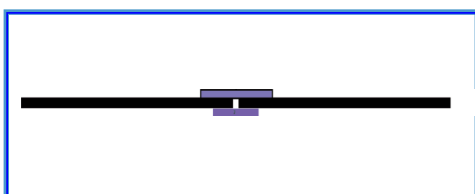

Butt splice



Reel closure